




C13-16 300MF/300VDC
C17 .05/600
R39-42 100K, 2W, 10%
R43 2.2K, 2W, 10%
NOT USED: C6, 7, 9, 10, 11
R18-21, 23, 24, 26, 27
30-37
LAST NOS. C17, R43
ALL RESISTORS 1/2 WATT
EXCEPT AS NOTED.
* DENOTES TYPICAL
VOLTAGE.

COMPONENT VALUES FOR 6dB/OCTAVE CROSSOVER SLOPE			
CROSSOVER FREQ.	C1	C3	C5
50 Hz	.037 uf	.01 uf	.0096 uf
100 Hz	.019 uf	.005 uf	.0048 uf
200 Hz	.0093 uf	.0025 uf	.0024 uf
400 Hz	.0046 uf		.0012 uf
800 Hz	.0023 uf	C3 USED	600 pf
1K Hz	.0019 uf	FOR 12dB BASS	480 pf
1.5K Hz	.0012 uf	ROLLOFF	320 pf
2K Hz	930 pf		240 pf
3.5K Hz	530 pf		140 pf
5K Hz	370 pf		100 pf

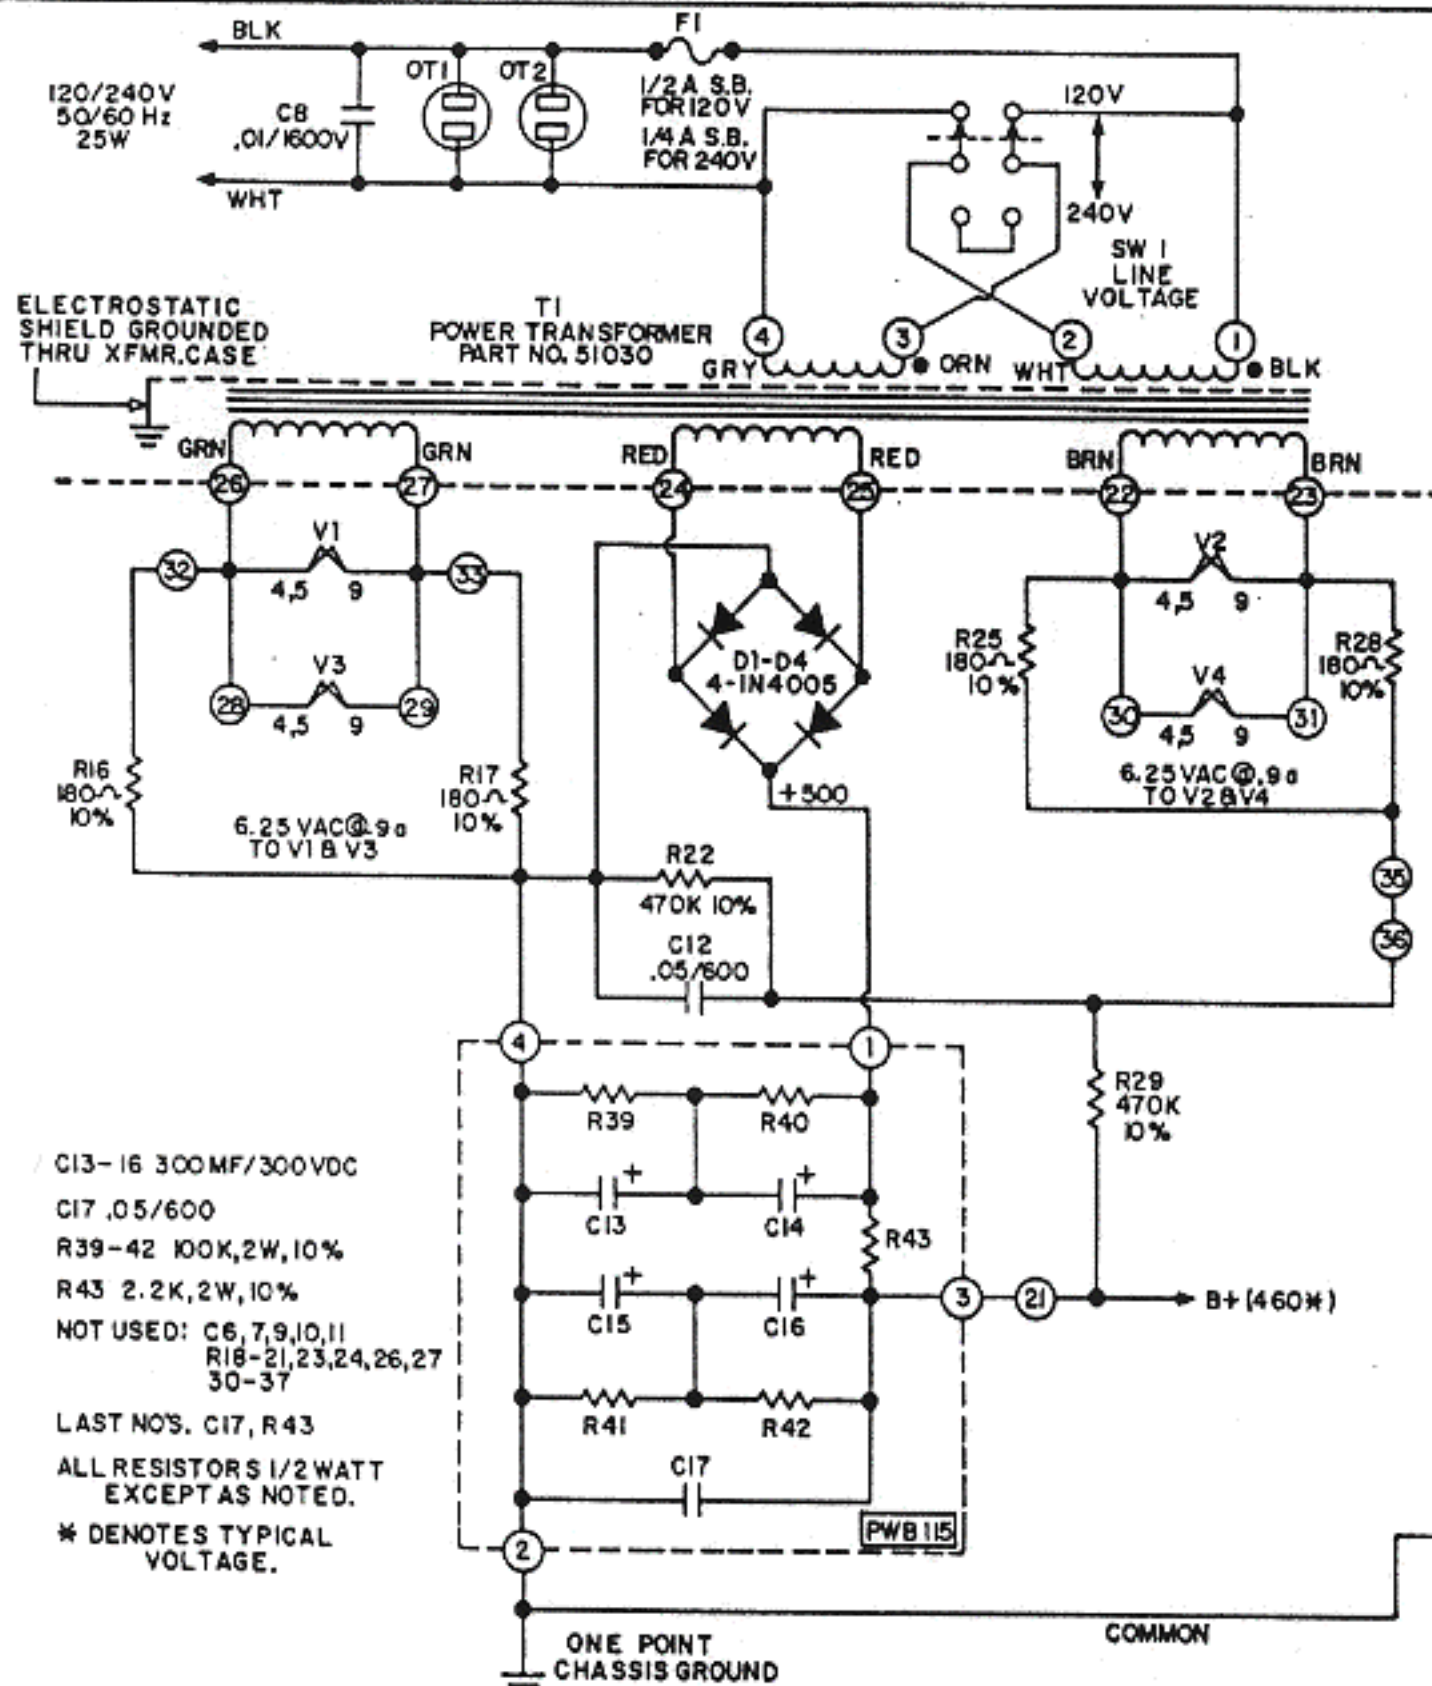