



# JAMES - SINGLE END OUTPUT TRANSFORMER

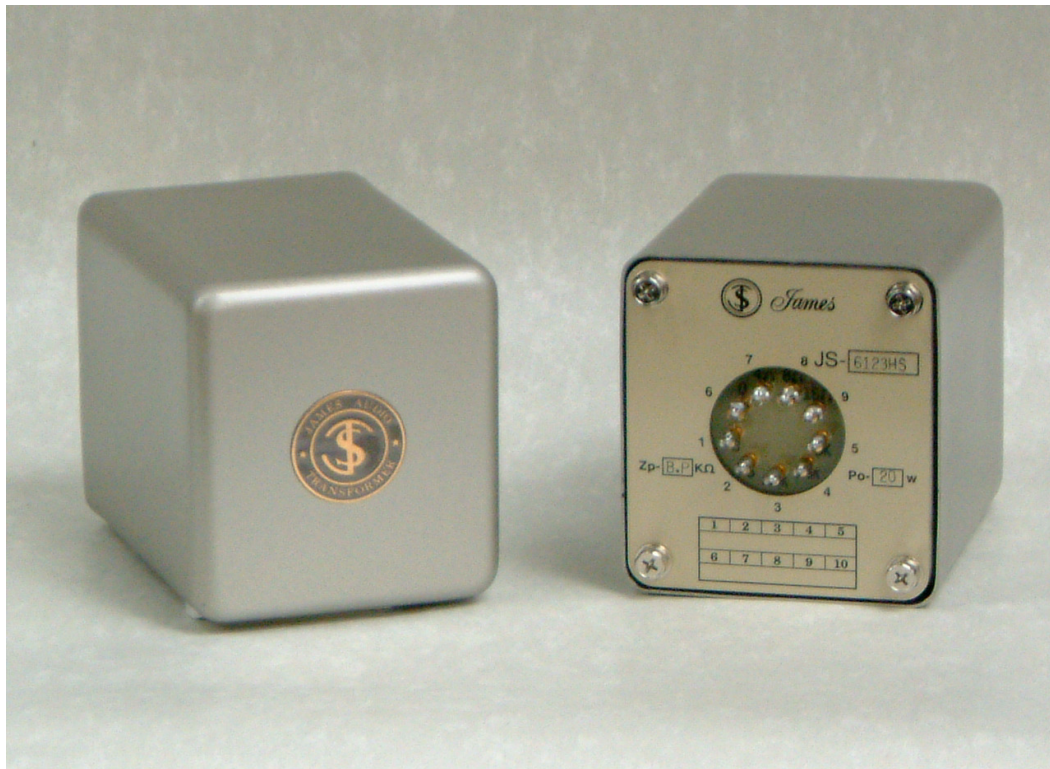


| MODEL      | Primary<br>DC Bias<br>Current | Impedance<br><br>B-P | Power | Frequency<br><br>Response | Suitable<br><br>Tube | Dimension | Weight<br><br>(Kg) |
|------------|-------------------------------|----------------------|-------|---------------------------|----------------------|-----------|--------------------|
| JS-6112HS  | 70mA                          | 2.5K / 3.5K          | 10W   | 32Hz~62KHz-2dB            | 2A3                  | L         | 1.7                |
| JS-6113HS  | 60mA                          | 3.5K / 5 K           | 10W   | 27Hz~60KHz-2dB            | 6V6                  | L         | 1.7                |
| JS-6115HS  | 50mA                          | 5K / 7 K             | 10W   | 31Hz~43KHz-2dB            | 6BQ5                 | L         | 1.7                |
| JS-6123HS  | 90mA                          | 2.5K / 3.5K / 5K     | 20W   | 20Hz~60KHz-2dB            | 2A3 /300B            | F         | 3.2                |
| JS-6130HF  | 250mA                         | 600Ω                 | 30W   | 20Hz~69KHz-2dB            | 6C33/ 6AS7           | D         | 4.8                |
| JS-6132HSF | 110mA                         | 2.5K                 | 30W   | 18Hz~60KHz-2dB            | 2A3/300B             | D         | 4.8                |
| JS-6133HSF | 100mA                         | 3.5K                 | 30W   | 18Hz~50KHz-2dB            | EL34/300B            | D         | 4.8                |
| JS-6135HSF | 80mA                          | 5K                   | 30W   | 18Hz~50KHz-2dB            | 211 / 845            | D         | 4.8                |
| JS-6153HF  | 120mA                         | 3.5K                 | 50W   | 20Hz~51KHz-2dB            | 805 / 810            | C         | 6.3                |
| JS-6157HF  | 90mA                          | 7K                   | 50W   | 20Hz~35KHz-2dB            | 211/ 845             | C         | 6.3                |
| JS-6159HF  | 65mA                          | 10K                  | 50W   | 20Hz~35KHz-2dB            | 211/ 845             | C         | 6.3                |
| JS-6173HF  | 150mA                         | 3.5K                 | 70W   | 19Hz~52KHz-2dB            | 100TH                | A         | 7.5                |


L: 80 x 90 x 90H (mm)

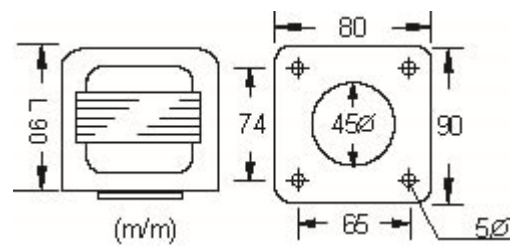

C (150H m/m) , D (130H m/m) , E (110H m/m) :

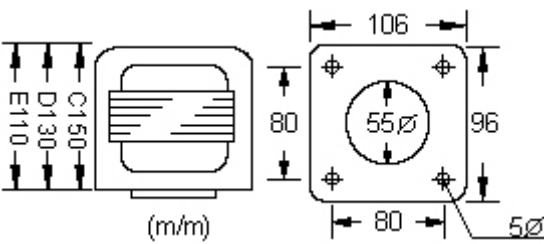

F (110H m/m),G (100H m/m)

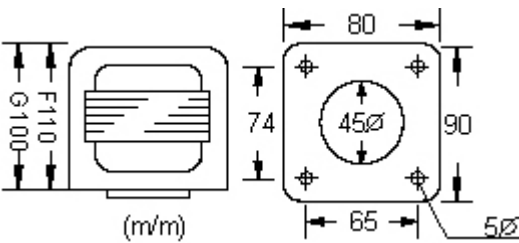

A (150H m/m),B (130H m/m)

