


Technical Manual

L26 Decade

JBL

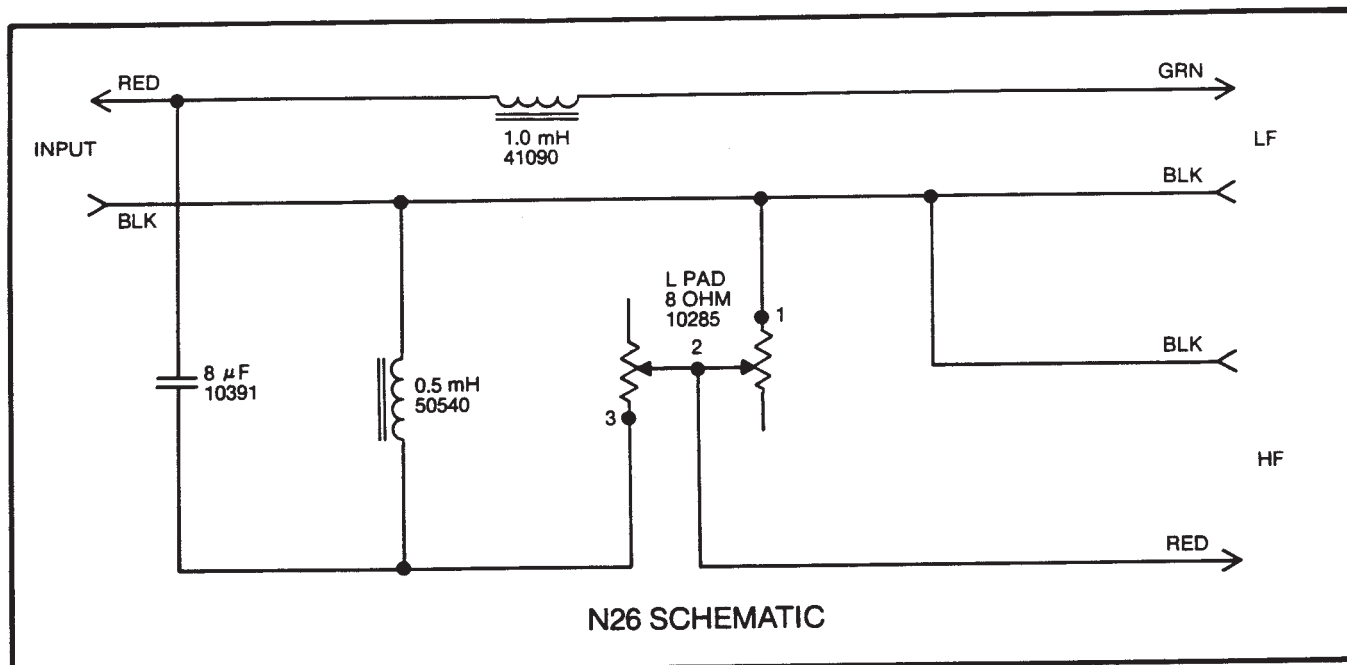

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:

125A
Cone Kit: C8R127A
Nom. Impedance: 8 Ohm
Dynamic Test Input V: 5
Sweep Frequency Hz: 30-1200
D.C. Resistance Ohms: 4.7 minimum
5.7 maximum
Gap Gauge: .044"
Notes: Dome Inverted

If Not Serviceable,

Replace With: 125HR

Visual Change: Yes

Baffle Modification: No

Exact Acoustic Replacement: No.

Slightly different. Replace both units in a stereo pair.

Additional Parts Currently Available*:

Dome: 50201

Terminal Board: 52348

Mounting Gasket: 52089

Trim Gasket: 52315

HIGH FREQUENCY DRIVER:

LE25-2
Diaphragm Kit: D8RLE252
Nom. Impedance: 8 Ohm
Dynamic Test Input V: 3
Sweep Frequency Hz: 500-1200

HIGH FREQUENCY DRIVER (Cont'd)

D.C. Resistance Ohms: 3.6 minimum
4.4 maximum

Gap Gauge: .029"

Notes: Kit includes parts for similar models. Use required parts only.

If Not Serviceable,

Replace With: 035TiA

Visual Change: Yes

Baffle Modification: Yes

Exact Acoustic Replacement: No. Use as a last resort. Replace both units in a stereo pair.

Additional Parts Currently Available*:

Trim Ring: 53363

Mounting Gasket: 50949-01

Dome: 21606

SYSTEM SPECIFICATIONS:

Nominal Impedance: 8 Ohm

Power Capacity: 35 Watts

Continuous Program

Crossover Frequency: 2000 Hz

Sensitivity: 76dB (1 Watt @ 15 Feet)

Enclosure Dim: 12-3/4" x 24" x 13-1/4" D
324mm x 610mm x 336mm

Shipping Weight: 42 lbs. - 19 kg.

Additional Parts Currently Available*:

Binding Posts: Red: 56131

Black: 56130

*Other parts may also be available. Check with JBL for details.